



DS-2CE56A2P(N)-VFIR3 700TVL DIS Vari-focal IR Dome Camera

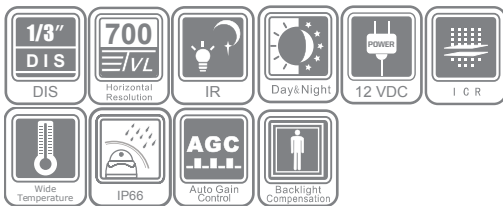

Key Features

- 1/3" DIS
- 700 TVL horizontal resolution
- 2.8 – 12mm vari-focal lens
- True Day/Night
- Up to 40m IR distance
- Smart IR mode
- IP66 weatherproof
- Wide operating temperature range

Dimensions

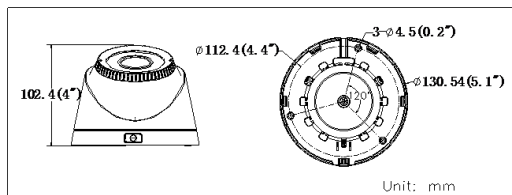

Order Models

- DS-2CE56A2P-VFIR3
- DS-2CE56A2N-VFIR3

DS-2CE56A2P(N)-VFIR3	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) x 496 (V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON), 0 Lux with IR 0.14Lux @ (F1.4,AGC ON), 0 Lux with IR
Shutter Speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	2.8 - 12 mm @ F1.4 Angle of view: 80° - 27.2°
Lens Mount	Φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 7.5 W
Ingress Protection	IP66
IR Range	40m
Dimension	Φ130.54 × 102.4mm (Φ5.1" × 4")
Weight	